

TANK/MIXER ASSEMBLY MODEL DTE05PTASB700CS

MODEL PTA-SB-700-CS

- Materials: Carbon Steel
- Diameter: 60" ID
- Straight Section: 60"
- Sloping Bottom: 2"
- Flange for Heater Entry

MODEL DTE-05-350-TEFC/SS304

- Motor, 5 HP, 3/60/240V, TEFC
- Reducer, SEW, In-Line, Hollow Bore
- Mixing Shaft Speed: 50-350 rpm, With VFD Controller
- Turbine, 24" Diameter, 3 Blade, Very High Efficiency (Style VHE)


MODEL DIH-25KW-SS304

- Heater, Immersion
- Power, 25 KW, 208 Volts, 3 Phase
- Elements length: 42"
- Mounting Flange: 2" ANSI, SS304



DANTCO MIXERS CORPORATION
9 OAK STREET
PATERSON, NJ 07501-3013
973-278-8776, FAX 973-278-1538

EMAIL sales@dantco.com, WEB <http://www.dantco.com>

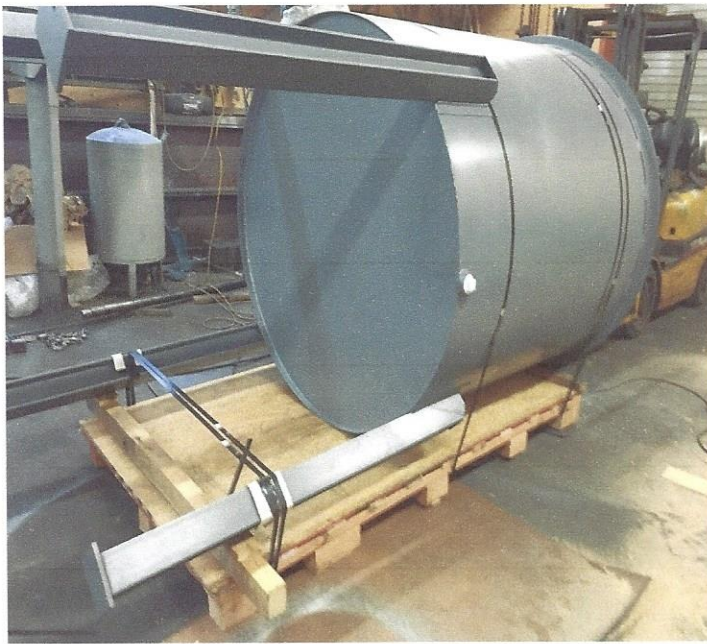

TANK/MIXER ASSEMBLY MODEL DTE05PTASB700CS

MIXER, SERIES 5016, MODEL DTE-05-350-TEFC/SS304

- Motor, 5 HP, 3/60/240V, TEFC
- Reducer, SEW, in line, hollow bore, 5 to 1 ratio
- Mixing shaft, 1 ½" diameter, SS304
- Mixing shaft speed range 50 to 350 rpm with VFD controller (supplied by others)
- Turbine, 24" diameter, 3 blade, very high efficiency (style VHE)

MIXING TANK, MODEL PTA-SB-700-CS

- Materials: Carbon steel
- Diameter, 60" ID
- Straight section, 60"
- Sloping bottom, 2 "
- Legs, 4WF13#, 4 req'd
- Leg pads, 8"x8"x1/2"
- Top angle ring, 2"x2"x1/4"
- Drain, 2" FNPT
- Flange for heater entry, 4" up the sloping bottom (heater by others)
- Mixer mounting bracket welded/bolted to top angle ring
- Inside finish, welds ground smooth
- Outside finish, gray enamel
- Working capacity, 700 gallon
- Maximum capacity,
- Lineal capacity,



DANTCO MIXERS CORPORATION
9 OAK STREET
PATERSON, NJ 07501-3013
973-278-8776, FAX 973-278-1538
EMAIL sales@dantco.com, WEB <http://www.dantco.com>